




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2015/08/17	KAIHUI

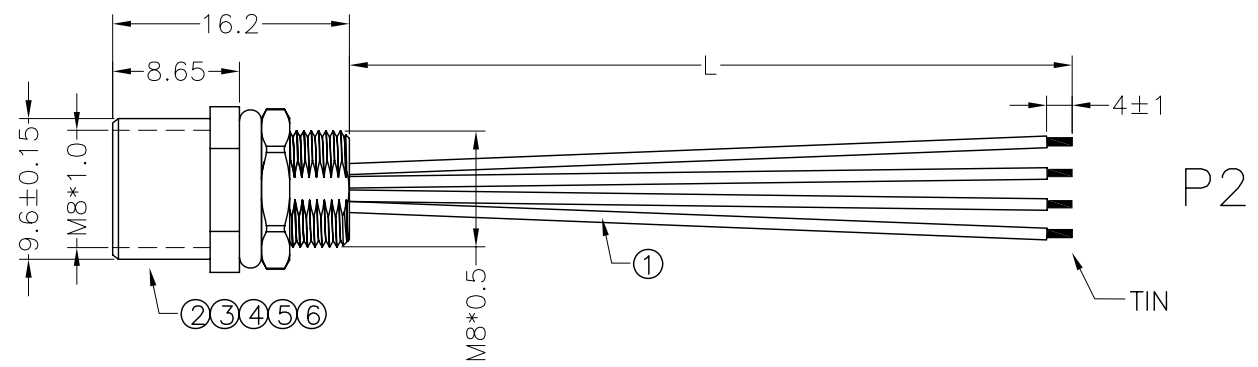

RECOMMEND
PANEL CUT-OUT

P1



P2

Detailed Product Description:
Waterproof connector rating is IP67/IP68
Protected from dust and water during immersion,
resistant to many oils and chemical etc

Electrical character
Rating voltage: 30V AC/DC ,
Insulation resistance: >100MΩ
Rating current : 3A
Contact resistance ≤10mΩ

Other Specification
Contact PIN: Phosphor bronze with Gold plating.
Coupling nut/screw: Brass with nickel plating
Insulation plastic: PA66+GF
Degree of protection: IP67/IP68
Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

SGN NO	L(mm)
PM08BAF04003C1	100±10
PM08BAF04003C2	200±10
PM08BAF04003C3	300±10

WIRE LIST

P1	COLOR	P2
1	BROWN	S/T
2	WHITE	
3	BLUE	
4	BLACK	

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑥	NU00004	M8*0.5 BRASS PLATED NI NUT L*W=2.0*10mm	1	PCS
⑤	GLO0002	BLACK EPOXY RESIN	1	g
④	OR00012	M8 Green Viton circle φ7.00*1.5mm	1	PCS
③	WK00070	M8 BRASS PLATED NI FEMALE REAR MOUNT M8*0.5 L=16.2mm	1	PCS
②	PD000026	M8 A CODING 4PIN FEMALE CONNECTOR	1	SET
①	N/A	UL1007 24AWG HOOK UP WIRE	1	SET

SIGNAL[®]

ShenZhen Signal Electronics co.,Ltd

DRAWN BY		DATE	
CHECKED BY		DATE	
APPROVED BY		DATE	

TITLE		M8 4P/F REAR MOUNT CABLE	
SGN NO		SEE TABLE	
DWG NO		REV.	
CUSTOMER		S0	

TOLERANCES ARE:		THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	SIZE: A4	UNITS: mm
.x ±0.5	x.' ±2.0'	SCALE:	SHEET: 1 OF 1
.xx ±0.20	.x' ±1.0'		

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.