

1

2

3


4

5

6

T/NO.			
模号			

版本/REV.	变更内容/DESCRIPTION	日期/DATE	绘图/REVISED BY
A0	CREATED DRAWING	2014/09/26	ZERA

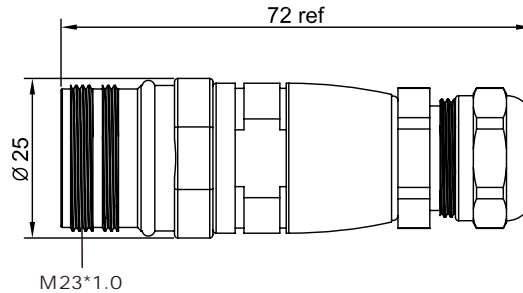

Electrical character

Contacts	Rated voltage		Rated current	Contact Resistance	Cable OD (mm)
	A/C	D/C			
	250V	250V	20A	3mΩ	6~8
	250V	250V	20A	3mΩ	6~8
	250V	250V	8+20	3mΩ	6~8
	150V	150V	8A	3mΩ	6~8
	150V	150V	8A	3mΩ	6~8
	150V	150V	8A	3mΩ	6~8
	150V	150V	(8+10)A	3mΩ	6~8

Detailed Product Description:
 Waterproof connector rating is IP67/IP68
 Protected from dust and water during immersion, resistant to many oils and chemical etc

Other Specification
 Contact PIN: Brass with Gold plating.
 Coupling nut/screw: Brass with nickel plating
 Insulation plastic: PA66+GF
 Degree of protection: IP67/IP68
 Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

深圳市盛格纳电子有限公司 Shen Zhen Signal Electronics co.,Ltd		TITLE/产品名称 M23 MALE CONNECTOR ASSEMBLE		PROJECTION: 		TOLERANCES UNLESS NOTED: 未标注尺寸公差	
DRAWN BY: 制图:		日期/DATE:		CUSTOMER PART NUMBER 客户料号		UNITS: mm	
CHECKED BY: 审核:		日期/DATE:		SGN PART NUMBER 产品编号 M23AM0001		SCALE: NONE	
APPROVED BY: 核准:		日期/DATE:		DRAWING NUMBER 样品图号		SIZE: A4	
				TOLERANCES UNLESS NOTED: 未标注公差:		SHEET: 1/1	

1

Web: <http://www.sz-signal.com/>

3

E-mail: saudi@sz-signal.com

5

6